

## DIODE(NON-ISOLATED TYPE)

# MDF(R)250A

TOP





MDF(R)250A is a diode with flat mounting base which is designed for use in various rectifier applications.

- $I_{F(AV)} = 250A$ ,  $V_{RRM} = 500V$
- Easy Construction with Anode (F) Type and Cathode (R) type.
- High reliability by glass passivation

### (Applications)

Various Rectifiers  
Welding Power Supply

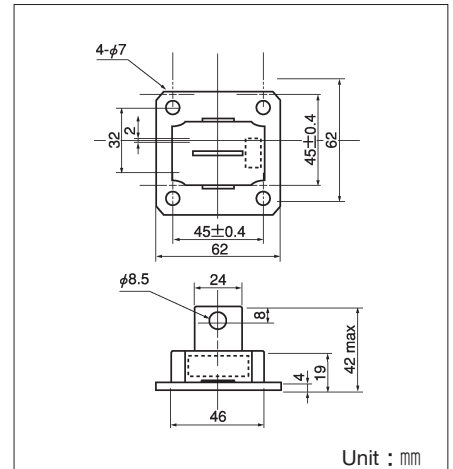

Unit : mm

### Maximum Ratings

( $T_j = 25^\circ\text{C}$ )


Symbol	Item	Ratings			Unit
		MDF(R)200A30	MDF(R)200A40	MDF(R)200A50	
$V_{RRM}$	Repetitive Peak Reverse Voltage	300	400	500	V
$V_{RSM}$	Non-Repetitive Peak Reverse Voltage	360	480	600	V
$V_R(DC)$	D.C. Reverse Voltage	240	320	400	V

Symbol	Item	Conditions	Ratings	Unit	
$I_{F(AV)}$	Average Forward Current	Single phase, half wave, $180^\circ$ conduction, $T_c : 92^\circ\text{C}$	250	A	
$I_{F(RMS)}$	R.M.S. Forward Current	Single phase, half wave, $180^\circ$ conduction, $T_c : 92^\circ\text{C}$	390	A	
$I_{FSM}$	Surge Forward Current	$1/2$ cycle, 50Hz/60Hz, peak value, non-repetitive	4000/4500	A	
$I^2t$	$I^2t$	Value for one cycle of surge current	84000	$\text{A}^2\text{S}$	
$T_j$	Junction Temperature		$-30 \sim +150$	$^\circ\text{C}$	
$T_{stg}$	Storage Temperature		$-30 \sim +125$	$^\circ\text{C}$	
	Mounting Torque	Mounting (M6)	Recommended Value 2.5~3.9 (25~40)	4.7 (48)	N·m (kgf·cm)
		Terminal (M8)	Recommended Value 8.8~10 (90~105)	11 (115)	
	Mass			170	g


### Electrical Characteristics

Symbol	Item	Conditions	Ratings	Unit
$I_{RRM}$	Repetitive Peak Reverse Current, max.	at $V_{DRM}$ , single phase, half wave, $T_j = 150^\circ\text{C}$	15	mA
$V_{FM}$	Forward Voltage Drop, max.	Forward current 800A, $T_j = 25^\circ\text{C}$ , Inst. measurement	1.15	V
$R_{th(j-c)}$	Thermal Impedance, max.	Junction to case	0.2	$^\circ\text{C}/\text{W}$


### Maximum Forward Characteristics

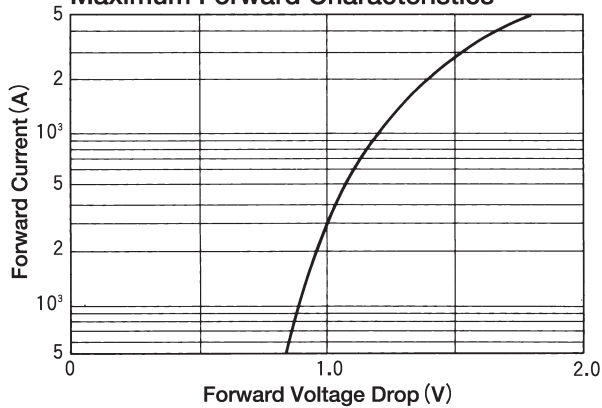


### Average Forward Current vs. Power Dissipation

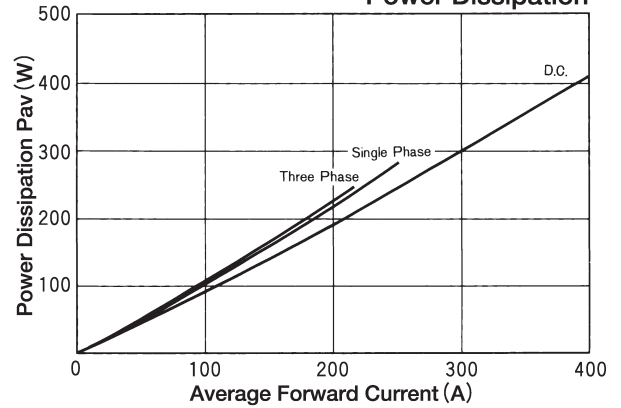

### Average Forward Current vs. Allowable Case Temperature

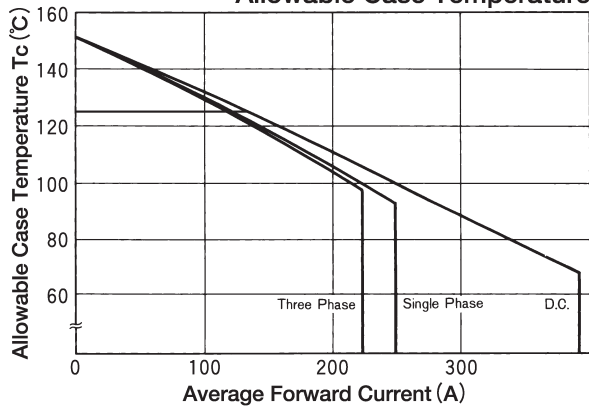

### Cycle Surge Forward Current Rating (Non-Repetitive)

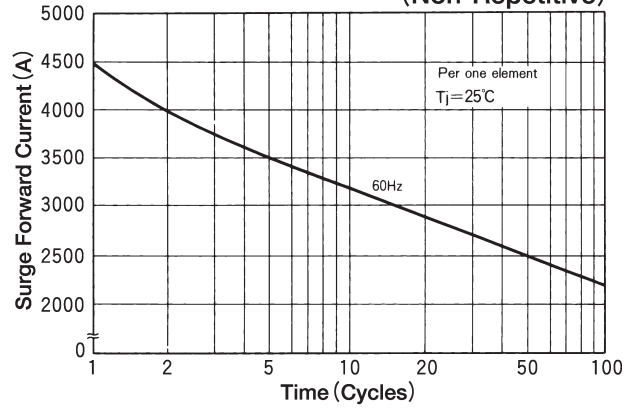

### Transient Thermal Impedance

